


G-215



- Forged, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Hot-dip galvanized.
- Sizes 3/8 inch and below are mechanically galvanized.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are Quenched and Tempered and can meet DNV impact requirements of 42 Joules (31 ft-lb) at -20° C (-4° F).
- G-215 Round pin chain shackles meet the performance requirements of Federal Specification RR-C-271H, Type IVB, Grade A, Class 1, except for those provisions required of the contractor.
- DO NOT SIDE LOAD ROUND PIN SHACKLES.
- Look for the Red Pin®... the mark of genuine Crosby quality.

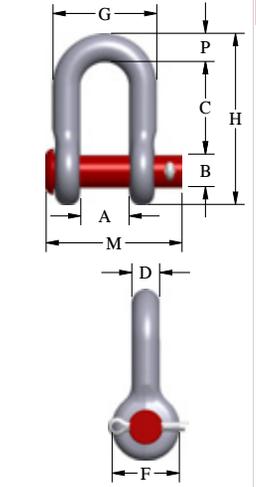

G-215 Round Pin Chain Shackles

Nominal Size (in)	Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)											Replacement Pin Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	F	G	H	M	P	
1/4	1/2	1018810	.10	.47	.06	.32	.87	.06	.25	.62	.97	1.59	1.34	.25	-
5/16	3/4	1018838	.18	.53	.06	.39	1.04	.06	.31	.75	1.15	1.91	1.63	.31	-
3/8	1	1018856	.25	.66	.06	.45	1.25	.13	.38	.92	1.42	2.31	1.86	.38	-
7/16	1 1/2	1018874	.40	.75	.06	.51	1.45	.13	.44	1.06	1.63	2.67	2.13	.44	-
1/2	2	1018892	.50	.81	.06	.64	1.62	.13	.50	1.18	1.81	3.03	2.38	.50	-
5/8	3 1/4	1018918	1.21	1.06	.06	.78	2.00	.13	.63	1.50	2.32	3.76	2.91	.63	-
3/4	4 3/4	1018936	2.00	1.25	.06	.88	2.38	.25	.75	1.81	2.75	4.53	3.44	.81	-
7/8	6 1/2	1018954	3.28	1.44	.06	1.03	2.81	.25	.88	2.10	3.20	5.33	3.82	.97	-
1	8 1/2	1018972	4.75	1.69	.06	1.16	3.18	.25	1.00	2.38	3.69	5.94	4.53	1.00	-
1-1/8	9 1/2	1018990	6.30	1.81	.06	1.28	3.56	.25	1.13	2.68	4.07	6.78	5.13	1.25	1082232
1-1/4	12	1019016	9.00	2.03	.13	1.41	3.93	.25	1.25	3.00	4.53	7.50	5.50	1.38	1082250
1-3/8	13 1/2	1019034	12.00	2.25	.13	1.53	4.38	.25	1.38	3.31	5.01	8.28	6.13	1.50	1082278
1-1/2	17	1019052	16.15	2.38	.13	1.66	4.87	.25	1.50	3.62	5.38	9.05	6.50	1.62	1082296
1-3/4	25	1019070	26.00	2.88	.13	2.03	5.76	.25	1.75	4.19	6.38	10.97	7.75	2.12	1082312
2	35	1019098	43.25	3.25	.13	2.28	6.75	.25	2.10	5.00	7.25	12.74	8.75	2.36	1082330

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

