

BOLT TYPE ANCHOR SHACKLES

Anchor Shackles Bolt Type with Thin Head Bolt, Nut and Cotter Pins, Forged Alloy Steel , High Tensile Strength.

Finished: Anchor Shackles are supplied in hot dip gray galvanized

Working Load Limit: Permanently shown on every Shackle.


Shackle Material: High Tensile Forged - Quenched and Tempered, Grade 6.

Shackle Size: Capacities 1/2 thru 25 metric tons.

Meet the performance requirements of Federal Specification RR-C-271G Type IVA, Grade A, Class 3 and EN13889 except for those provisions required of the contractor.



P2130

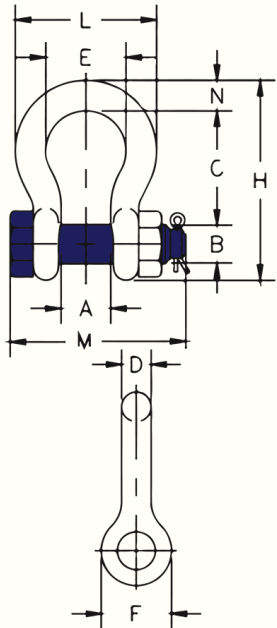

Stock number	Size	WLL	Dimension (MM)									Weight kg
	(in.)	t	a	B	c	d	e	f	g	h	i	
10240014	¼	0.5	11.9	7.85	28.7	6.35	19.8	15.5	46.7	32.5	6.35	0.05
10240516	5/16	0.75	13.5	9.65	31	7.85	21.3	19.1	53	37.3	7.85	0.1
10240038	3/8	1	16.8	11.2	36.6	9.65	26.2	23.1	63	45.2	9.65	0.15
10240716	7/16	1.5	19.1	12.7	42.9	11.2	29.5	26.9	74	51.5	11.2	0.22
10240012	½	2	20.6	16	47.8	12.7	33.3	30.2	83.5	58.5	12.7	0.36
10240058	5/8	3.25	26.9	19.1	60.5	16	42.9	38.1	106	74.5	17.5	0.76
10240034	¾	4.75	31.8	22.4	71.5	19.1	51	46	126	89	20.6	1.23
10240078	7/8	6.5	36.6	25.4	84	22.4	58	53	148	102	24.6	1.79
10240001	1	8.5	42.9	28.7	95.5	25.4	68.5	60.5	167	119	26.9	2.57
10240114	1-1/4	12	51.5	35.1	119	31.8	82.5	76	210	146	35.1	5.31
10240138	1-3/8	13.5	57	38.1	133	35.1	92	84	233	162	38.1	7.18
10240112	1-1/2	17	60.5	41.4	146	38.1	98.5	92	254	175	41.1	9.43
10240134	1-3/4	25	73	51	178	44.5	127	106	313	225	57	15.4

*Maximum Proof Load is 2 times the Working Load Limit.

*Minimum Ultimate Strength is 6 times the Working Load Limit.

